



VpCI® ADDITIVES FOR WATER TREATMENT



S-69 P, S-69 PMF, and S-69 B

Powder VpCI® Water Treatment Building Blocks



PRODUCT DESCRIPTION

S-69 Powders are Vapor phase Corrosion Inhibitors (VpCI®) developed as corrosion prevention additives for the water treatment industry. These building blocks provide multimetal protection, including galvanized steel and yellow metals. The VpCIs form a strong monomolecular layer on the metal surface that protects in all three phases-liquid, vapor, and the vapor-liquid interface. S-69 Powders provide water treatment companies with the ability to incorporate Cortec® VpCI technology into their specific formulations.

The concentration of S-69 inhibitor in an application can be monitored with a molybdenum tracing kit, or with UV spectroscopy.

A molybdenum-free version (S-69 PMF), and lower-pH version (S-69B,) of S-69P are also available.

TYPICAL APPLICATIONS

S-69 Powders are anticorrosion additives to water treatment formulations to replace chromates, nitrites, phosphonates, and other types of restricted corrosion inhibitors. Powder should be pre-diluted, forming a clear homogenous solution prior to addition into the system being treated.

DOSAGE RATES

- Closed loop-fresh water
Concentration of S-69 Powders under operating conditions for a closed loop system formulation start at 1500 ppm - 2000 ppm.
- Closed loop-brine
Concentration of S-69 Powders under operating conditions for a closed loop system formulation is 1-5 %.
- Open loop-fresh water
Concentration varies with formulations but can be used as low as 10-15 ppm in continuous feeds.
- Open loop-fresh water-passivation
Concentration of 3000-4000 ppm for 1-2 weeks.

FEATURES

- Protects carbon steels, zinc, stainless steel, galvanized steel, copper, and other metals
- Use S-69 B for aluminum protection
- Prevents corrosion and pitting
- Effective for open and closed loop cooling systems
- Contains contact and vapor phase corrosion inhibitors
- Can be used as a corrosion inhibitor additive in the majority of water treatment programs
- Compatible with the majority of commercially available biocides and antiscalants
- Nitrite, chromate, and heavy metal free
- Readily water-soluble powder for easy application
- Environmentally friendly formulation
- Easily traceable utilizing a Molybdenum test kit or with UV spectroscopy

TYPICAL PROPERTIES

Appearance: White to off-white powder
pH of S-69 P: 12.5-13.5 (10% aqueous)

ppm in DI Water	Conductivity
1000	~600 μ S
2000	~1700 μ S
3000	~2000 μ S
5000	~2700 μ S

pH of S-69 B: 9.1-9.6 (1% aqueous)


ppm in DI Water	Conductivity
250	~150 μ S
1000	~600 μ S
2000	~1120 μ S




CORTEC
CORPORATION

Environmentally Safe VpCI®/MCI® Technologies

Inhibitor Conc. vs. Abs at 230nm

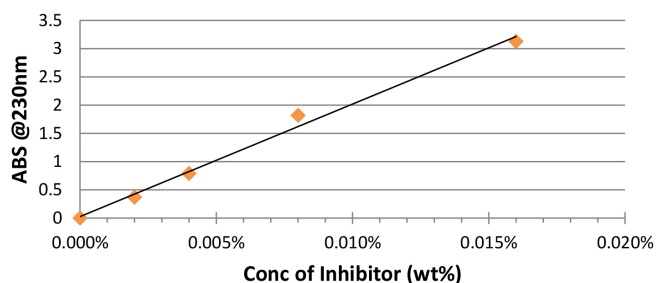

Theoretical concentration of Molybdenum vs. S-69P

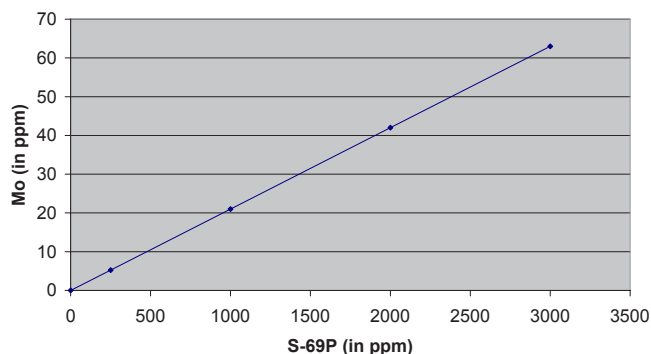

TOXICOLOGICAL TESTING RESULTS

TEST SPECIES	NOEC/LOEC, ppm	48-hr LC50*, ppm
M. beryllina	100/1000	316
M. bahia	100/1000	569
D. pulex	10,000/> 10,000	---
P. Promelas	10,000/> 10,000	---

*LC/50/EC50-50% of Lethal concentration/50 % of Effective Concentration respectively

PACKAGING AND STORAGE

S-69 Powders are packaged in 5 lb (2.27 kg) boxes and 50 lb (22.7 kg) and 100 lb (45.3 kg) drums. They should be stored in a tightly closed container. The shelf life is 2 years.

FOR INDUSTRIAL USE ONLY

KEEP OUT OF REACH OF CHILDREN

KEEP CONTAINER TIGHTLY CLOSED

NOT FOR INTERNAL CONSUMPTION

CONSULT SAFETY DATA SHEET FOR MORE

INFORMATION

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



Distributed by:



www.esvasolutions.com